



POS.	DESCRIPTION	MATERIAL	QTY
1	modified flange DN40 KF	1.4301 (304)	1
2	coaxial f/t type BNC, 50 Ohm, 1KV, 3A, double sided grounded shield, weldable	Stainless Steel	1

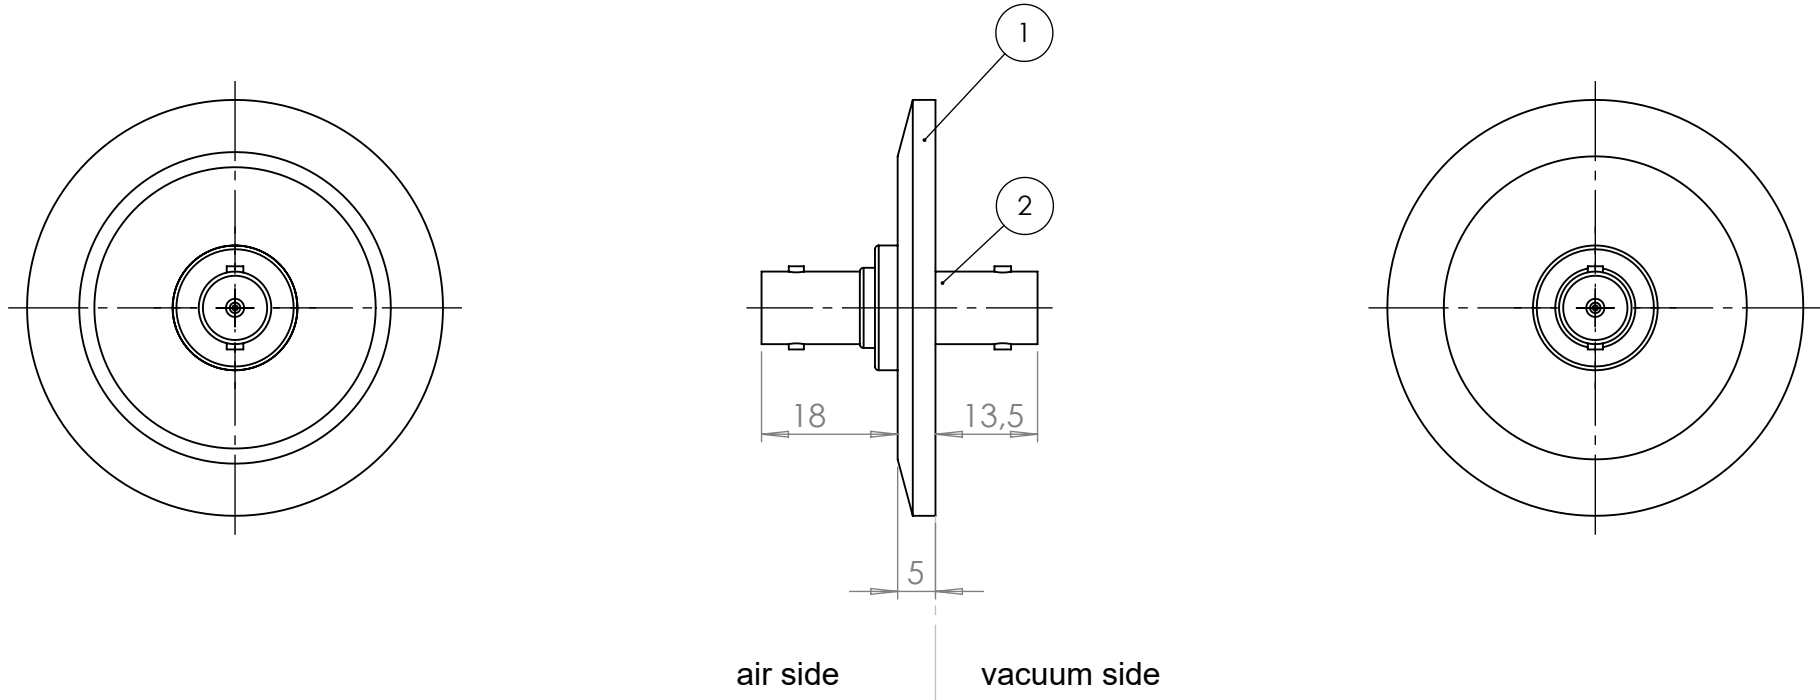

air side connector included

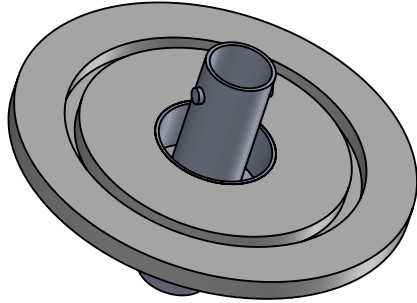

Definition Leckprüfung (definiton leak check)		Zeichnung Nutzung (using drawing)	
<1x10 E-9 bar*/l/sec, according DIN EN 1779		Drawing free for external use	
All informations provided in this drawing is considered to be confidential, proprietary and secret information. It is intended only for the use of individual or entity to whom it is sent. Individual or entity agrees to not disseminate or copy this information to anyone other than originally specified without the written consent Allectra GmbH.	Verwendetes Material (USED MATERIAL)	Bemerkung (REMARKS)	Kanten (EDGES) PROJECTION
	Toleranz (TOLERANCE) DIN EN 1390-C (welding ASSY)	Maßstab (SCALE): 1:1	Gewicht (WIGHT): 81.33g
Oberfläche (SURFACE) Cleaned UHV- Compatible	Rauheit (ROUGHNESS) 	Werkstoff (MATERIAL):	Bl. (page) A4 page 1 pages 1
origin name Allectra standard	DATE NAME	Benennung (DESCRIPTION): 1 off BNCD50 f/t on flange DN40 KF	
origin	Design 03.01.2024 AD		
(drw/sketch/part no)	Drawn 03.01.2024 AD		
date of origin	Check 03.01.2024 JB		
00 first origin	Approv 03.01.2024 AD	Zeich. Nr. (Drw. No.): 242-BNCD50-K40	
REV Beschreibung (CHANGING)	LAST SAVE DAT.: 03.01.2024	part. no. 242-BNCD50-K40	

